


HEAR AND LEARN SPEAKER WIRING INSTRUCTIONS FOR T25 AMP RECEIVER

T25 AMP IS MOUNTED VERTICALLY IN SOUNDHOUSE,




DRQ SPEAKER

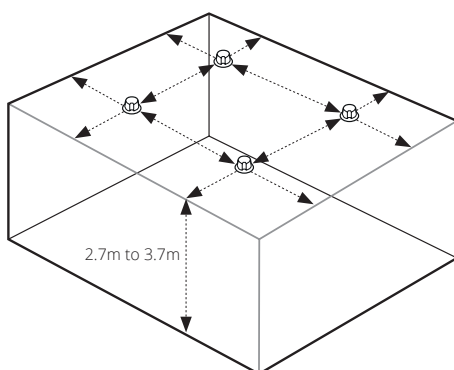

INSTALLATION

DRQ speakers are designed for flat plaster/tiles ceilings between 2.7m and 3.7m from floor. It is important that speakers mounted in ceiling tiles are installed safely and be equally spaced for even sound distribution.

WIRING 4 X 8 OHM SPEAKERS

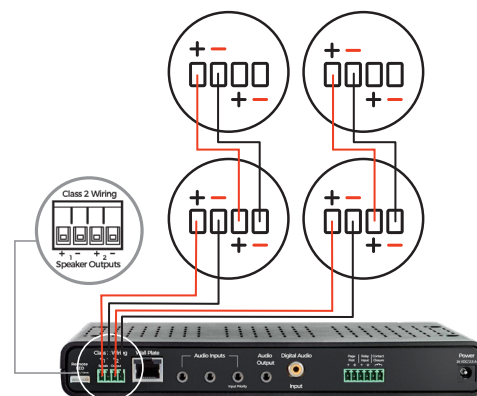


T25 AMP REAR

Red is positive. Black is negative.




WMQ SPEAKER

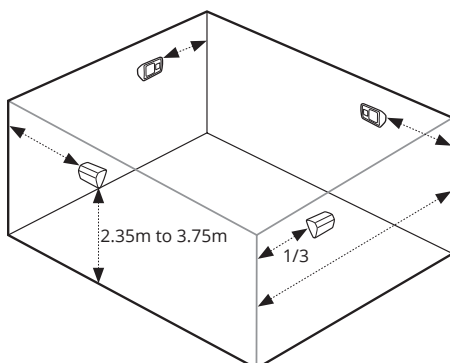

INSTALLATION

WMQ speakers are designed for wall mounting between 2.35m to 3.75m from the floor, depending on ceiling height, and 1/3 in from each corner of the room. No two speakers should be mounted directly across from one another and must be mounted out of reach.

WIRING 4 X 8 OHM SPEAKERS

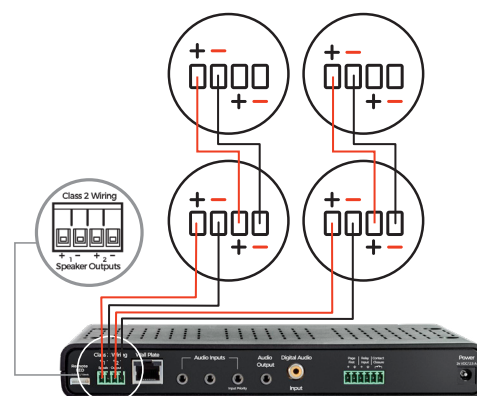

T25 AMP REAR

Red is positive. Black is negative.

C1055 PENDANT BALL SPEAKER



FOR CONNECTION TO T25 AMPLIFIER

The pendant ball speaker is supplied with seven smaller cables of various colours for connection to various types of amplifiers.

**Use red cable (positive) and
black cable (negative) only.**

WIRING 4 X 8 OHM SPEAKERS



T25 AMP REAR

Red is positive. Black is negative.


INSTALLATION

Pendant speakers are designed for pitched ceilings with voids and higher than 3.7m from floor. It is the installer's responsibility to test cabling, and correct any cabling issues. Speakers are to be installed safely in accordance with architect and/or electrical consultants instructions.

HEAR AND LEARN SPEAKER WIRING INSTRUCTIONS FOR T25 AMP RECEIVER

T25 AMP IS MOUNTED VERTICALLY IN SOUNDHOUSE,


DRQ SPEAKER

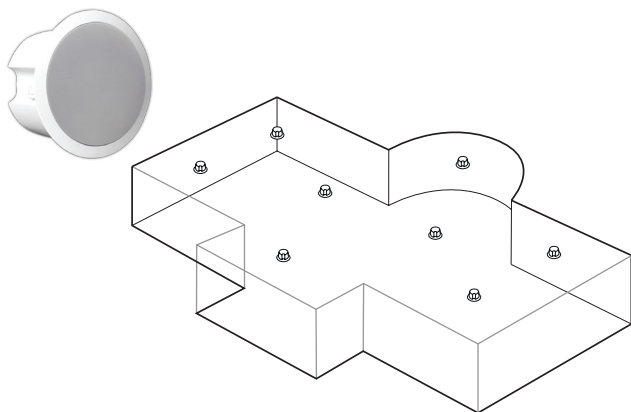

INSTALLATION

DRQ speakers are designed for flat plaster/tiles ceilings between 2.7m and 3.7m from floor. It is important that speakers mounted in ceiling tiles are installed safely and be equally spaced for even sound distribution.


WMQ SPEAKER

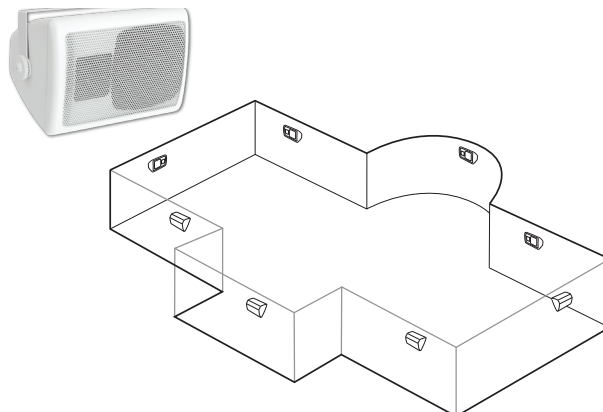

INSTALLATION


WMQ speakers are designed for wall mounting between 2.35m to 3.75m from the floor, depending on ceiling height, and 1/3 in from each corner of the room. No two speakers should be mounted directly across from one another and must be mounted out of reach.

WIRING 6 X 8 OHM SPEAKERS

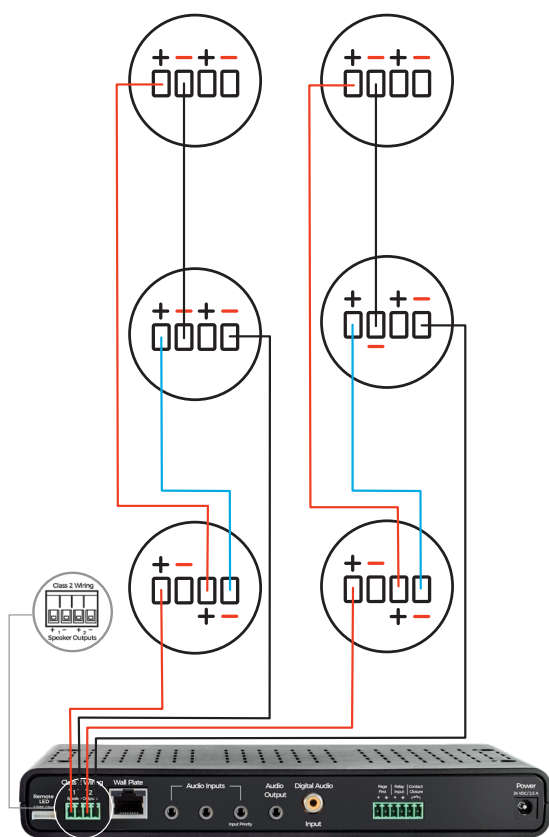

T25 AMP REAR
Red is positive. Black is negative.
Blue are bridging cables

WIRING 8 X 8 OHM SPEAKERS

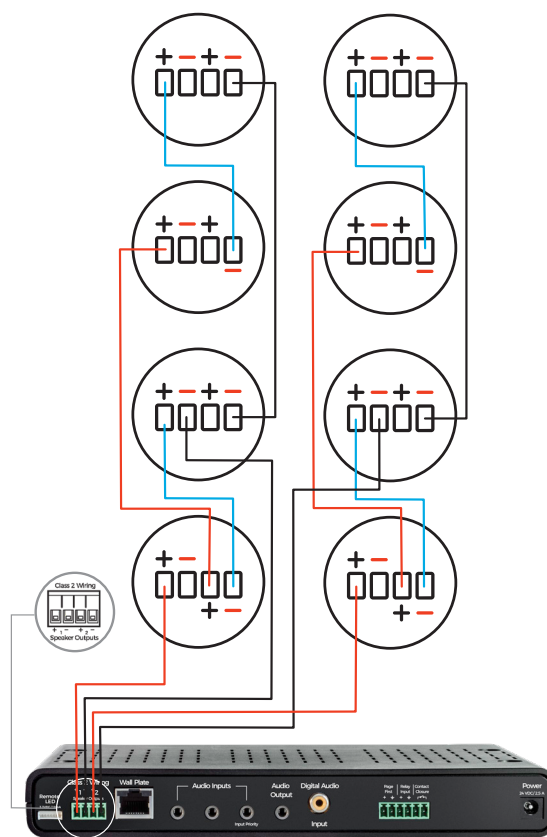

T25 AMP REAR
Red is positive. Black is negative.
Blue are bridging cables